

## TORNILLO AUTOPERFORANTE CON ALETAS Y CABEZA AVELLANADA TORX SIX LOBE COUNTERSUNK HEAD SERRATED SELFDRILLING SCREWS WITH WINGLETS

### FICHA TÉCNICA


#### TECHNICAL DATA SHEET



**Descripción:** Tornillo de acero cincado autopercutor.  
 Description: Zinc plated selfdrilling screw.

**Características:** Cabeza avellanada con impronta Torx y aletas.  
 Characteristics: Countersunk head with six lobes and winglets.

### CARACTERÍSTICAS TÉCNICAS / TECHNICAL DATA

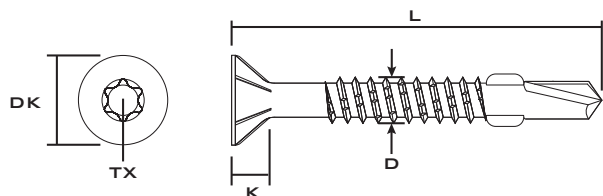

|                      |         |         |         |
|----------------------|---------|---------|---------|
| D                    | 4,8(10) | 5,5(12) | 6,3(14) |
| DK                   | 9,5     | 10,8    | 12,5    |
| K                    | 3       | 3,4     | 3,8     |
| ESPEJOR MAX. A FIJAR | 4,4     | 5,25    | 6       |
| IMP. TORX            | T-25    | T-30    | T-30    |

| D x L  | CAJA | KG % | D x L   | CAJA | KG %  |
|--------|------|------|---------|------|-------|
| 4,8x32 | 250  | 3,30 | 6,3x45  | 150  | 7,09  |
| 4,8x38 | 250  | 3,74 | 6,3x50  | 150  | 8,84  |
| 4,8x45 | 250  | 4,24 | 6,3x60  | 150  | 10,42 |
| 5,5x38 | 250  | 5,02 | 6,3x70  | 100  | 12,00 |
| 5,5x45 | 250  | 5,50 | 6,3x80  | 100  | 13,70 |
| 5,5x50 | 250  | 6,35 | 6,3x100 | 100  | 16,58 |