


TORNILLO DIN 912 8.8 CINCADO
ZINC PLATED SCREW DIN 912 8.8

Material / Material: Acero 8.8 / Steel 8.8
Recubrimiento / Coating: Cincado / Zinc plated

FICHA TÉCNICA
TECHNICAL DATA SHEET

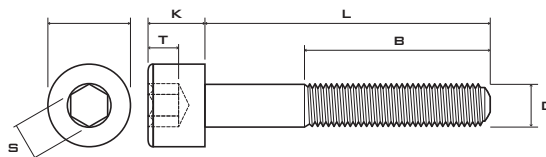

MEDIDAS DISPONIBLES / AVAILABLE MEASURES

Medidas en mm / Measures in mm

L	D	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20
6	*	*	*	*	*							
8	*	*	*	*	*							
10	*	*	*	*	*	*						
12	*	*	*	*	*	*	*					
14	*	*	*	*	*	*	*					
16	*	*	*	*	*	*	*	*				
18	*	*	*	*	*	*	*	*				
20	*	*	*	*	*	*	*	*	*			
22	*	*	*	*	*	*	*	*	*	*		
25	*	*	*	*	*	*	*	*	*	*		
30	*	*	*	*	*	*	*	*	*	*	*	*
35	*	*	*	*	*	*	*	*	*	*	*	*
40	*	*	*	*	*	*	*	*	*	*	*	*
45	*	*	*	*	*	*	*	*	*	*	*	*
50	*	*	*	*	*	*	*	*	*	*	*	*
55	*	*	*	*	*	*	*	*	*	*	*	*
60	*	*	*	*	*	*	*	*	*	*	*	*
65		*	*	*	*	*	*	*	*	*	*	*
70			*	*	*	*	*	*	*	*	*	*
75			*	*	*	*	*	*	*	*	*	*
80			*	*	*	*	*	*	*	*	*	*
85			*	*	*	*	*	*	*	*	*	*
90			*	*	*	*	*	*	*	*	*	*
95			*	*	*	*	*	*	*	*	*	*
100			*	*	*	*	*	*	*	*	*	*
110			*	*	*	*	*	*	*	*	*	*
120			*	*	*	*	*	*	*	*	*	*
130				*	*	*	*	*	*	*	*	*
140				*	*	*	*	*	*	*	*	*
150				*	*	*	*	*	*	*	*	*
160				*	*	*	*	*	*	*	*	*
170				*	*	*	*	*	*	*	*	*
180				*	*	*	*	*	*	*	*	*
190				*	*	*	*	*	*	*	*	*
200				*	*	*	*	*	*	*	*	*
210					*	*	*	*	*	*	*	*
220					*	*	*	*	*	*	*	*
230						*	*	*	*	*	*	*
240						*	*	*	*	*	*	*
250						*	*	*	*	*	*	*
260						*	*	*	*	*	*	*
270						*	*	*	*	*	*	*
280						*	*	*	*	*	*	*
300						*	*	*	*	*	*	*


B*	18,0	20,0	22,0	24,0	28,0	32,0	36,0	40,0	44,0	48,0	52,0
T (MIN)	1,3	2,0	2,5	3,0	4,0	5,0	6,0	7,0	8,0	9,0	10,0
S	2,5	3	4	5	6	8	10	12	14	14	17
K (MAX)	3,0	4,0	5,0	6,0	8,0	10,0	12,0	14,0	16,0	18,0	20,0
DK	5,5	7,0	8,5	10,0	13,0	16,0	18,0	21,0	24,0	27,0	30,0

* Longitud constante de la rosca siempre que L sea mayor que B / Constant thread length as long as L is greater than B

TORNILLO DIN 912 8.8 CINCADO
ZINC PLATED SCREW DIN 912 8.8

Material / Material: Acero 8.8 / Steel 8.8
Recubrimiento / Coating: Cincado / Zinc plated

FICHA TÉCNICA
TECHNICAL DATA SHEET

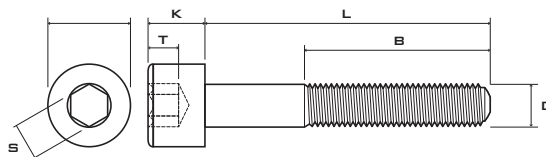

MEDIDAS DISPONIBLES / AVAILABLE MEASURES

Medidas en mm / Measures in mm

L	D	M22	M24	M27	M30	M33	M36	M39	M42	M45	M48
40	*	*	*	*	*						
45	*	*	*	*	*						
50	*	*	*	*	*						
55	*	*	*	*	*						
60	*	*	*	*	*	*	*				
65	*	*	*	*	*	*	*				
70	*	*	*	*	*	*	*	*	*		
75	*	*	*	*	*	*	*	*	*		
80	*	*	*	*	*	*	*	*	*	*	*
85	*	*	*	*	*	*	*	*	*	*	*
90	*	*	*	*	*	*	*	*	*	*	*
95	*	*	*	*	*	*	*	*	*	*	*
100	*	*	*	*	*	*	*	*	*	*	*
110	*	*	*	*	*	*	*	*	*	*	*
120	*	*	*	*	*	*	*	*	*	*	*
130	*	*	*	*	*	*	*	*	*	*	*
140	*	*	*	*	*	*	*	*	*	*	*
150	*	*	*	*	*	*	*	*	*	*	*
160	*	*	*	*	*	*	*	*	*	*	*
170	*	*	*	*	*	*	*	*	*	*	*
180	*	*	*	*	*	*	*	*	*	*	*
190	*	*	*	*	*	*	*	*	*	*	*
200	*	*	*	*	*	*	*	*	*	*	*
210	*	*	*	*	*	*	*	*	*	*	*
220	*	*	*	*	*	*	*	*	*	*	*
230	*	*	*	*	*	*	*	*	*	*	*
240	*	*	*	*	*	*	*	*	*	*	*
250	*	*	*	*	*	*	*	*	*	*	*
260	*	*	*	*	*	*	*	*	*	*	*
270	*	*	*	*	*	*	*	*	*	*	*
280	*	*	*	*	*	*	*	*	*	*	*
300	*	*	*	*	*	*	*	*	*	*	*

B*	56,0	60,0	66,0	72,0	78,0	84,0	90,0	96,0	100,0	108,0
T (MIN)	11,0	12,0	13,5	15,5	18,0	19,0	21,0	24,0	26,0	28,0
S	17	19	19	22	24	27	27	32	32	36
K (MAX)	22,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0
DK	33,0	36,0	40,0	45,0	50,0	54,0	58,0	63,0	68,0	72,0

* Longitud constante de la rosca siempre que L sea mayor que B / Constant thread length as long as L is greater than B