


REMACHE FLOR ALUMINIO / ACERO

ALUMINIUM / STEEL BLIND RIVET PEEL DOMED HEAD

FICHA TÉCNICA


TECHNICAL DATA SHEET

PARTE PART	MATERIAL MATERIAL	ACABADO FINISH
CUERPO BODY	ALUM. AL5154	PULIDO POLISHED
MANDRIL MANDREL	ACERO CARBONO CARBON STEEL	ACERO CINCADO CR3+ CR3+ ZINC PLATED STEEL

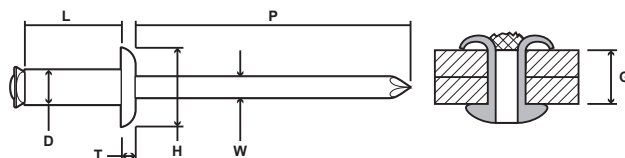

RESAF

MEDIDA REMACHE RIVET MEASURE	Ø REMACHE RIVET Ø	Ø CABEZA HEAD Ø	ALTURA CABEZA HEAD HEIGHT	MAND. SALIENTE MAND. PROTRUSION	Ø MANDRIL MANDREL Ø	CIZALLA TÍPICA TYPICAL SHEAR	TENSIÓN TÍPICA TYPICAL TENSILE	Ø AGUJERO REC. REC. HOLE Ø
	(D) m.m.	(H) m.m.	MAX. (T) m.m.	MIN. (P) m.m.	NOM. (W) m.m.	MIN.	MIN.	m.m.
3,2	3,05-3,35	5,8-6,5	1,2	27	1,83	760 N 170 Lbs	980 N 220 Lbs	3,5-3,6
4,0	3,85-4,15	7,0-8,0	1,5	27	2,22	1.160 N 260 Lbs	1.560 N 350 Lbs	4,3-4,4
4,8	4,65-4,95	8,5-9,5	1,6	27	2,72	1.690 N 380 Lbs	2.230 N 500 Lbs	5,1-5,2

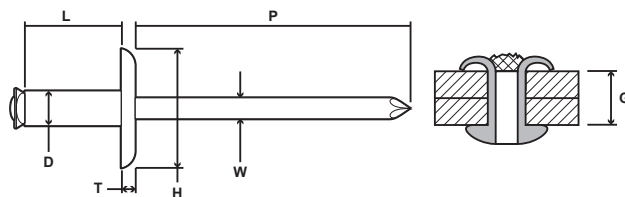

RFA

MEDIDA REMACHE / CABEZA MEASURE RIVET / HEAD	Ø REMACHE RIVET Ø	Ø CABEZA HEAD Ø	ALTURA CABEZA HEAD HEIGHT	MAND. SALIENTE MAND. PROTRUSION	Ø MANDRIL MANDREL Ø	CIZALLA TÍPICA TYPICAL SHEAR	TENSIÓN TÍPICA TYPICAL TENSILE	Ø AGUJERO REC. REC. HOLE Ø
	(D) m.m.	(H) m.m.	MAX. (T) m.m.	MIN. (P) m.m.	NOM. (W) m.m.	MIN.	MIN.	m.m.
4,0 / 10	3,85-4,15	9,0-10,5	1,9	27	2,22	1.160 N 260 Lbs	1.560 N 350 Lbs	4,33-4,4
4,0 / 12	3,85-4,15	11,0-12,5	1,9	27	2,22	1.160 N 260 Lbs	1.560 N 350 Lbs	4,33-4,4
4,8 / 14	4,65-4,95	13,0-14,5	2,1	27	2,72	1.690 N 380 Lbs	2.230 N 500 Lbs	5,1-5,2
4,8 / 16	4,65-4,95	15,0-16,5	2,1	27	2,72	1.690 N 380 Lbs	2.230 N 500 Lbs	5,1-5,2

REMACHE FLOR ALUMINIO / ACERO

ALUMINIUM / STEEL BLIND RIVET PEEL DOMED HEAD

FICHA TÉCNICA

TECHNICAL DATA SHEET

RESAF

MEDIDA REMACHE RIVET MEASURE	LONG. CUERPO BODY LENGTH	RANGO AGARRE GRIP RANGE
	(L) -0,1/+0,5 m.m.	(G) m.m.
4,0	10	2,5-5,0
	12	4,5-7,0
	14	6,5-8,0
	16	7,5-10,0
	18	9,5-12,0
	20	11,5-14,0
4,8	25	13,5-19,0
	10	2,0-4,0
	12	3,5-6,0
	14	5,5-8,0
	16	7,5-10,0
	18	9,5-12,0
	21	12,5-15,0
	24	14,5-18,0
	30	20,5-24,0
	40	28,5-34,0

RFA

MEDIDA REMACHE RIVET MEASURE	LONG. CUERPO BODY LENGTH	RANGO AGARRE GRIP RANGE
	(L) -0,1/+0,5 m.m.	(G) m.m.
4,0	10	2,5-5,0
	12	4,5-7,0
	14	6,5-8,0
	16	7,5-10,0
	18	9,5-12,0
	20	11,5-14,0
4,8	10	2,0-4,0
	12	3,5-6,0
	14	5,5-8,0
	16	7,5-10,0
	18	9,5-12,0
	21	12,5-15,0
	24	14,5-18,0
	27	17,5-21,0
	30	28,5-34,0