

TORNILLO INVIOLEABLE ROSCA MADERA TX CINCADO

ZINC PLATED MUSHROOM HEAD 6 LOBE RECESS WOOD SCREW

FICHA TÉCNICA

TECHNICAL DATA SHEET

Material / Material:
Recubrimiento / Coating:

Acero C1022 - SAEJ403 / Steel C1022 - SAE J403
 Cincado plata Cr3 5µm / Zinc plated Cr3 5µm




CARACTERÍSTICAS Y VENTAJAS / CHARACTERISTICS AND ADVANTAGES

- Para uso en cualquier tipo de montajes de carpintería de madera.
- Cabeza especial tipo flor, con huella TX-40.
- Una vez fijado, se introduce a presión un tapón de zamak en la huella TX, consiguiendo una fijación con propiedades inviolables.
- Aplicaciones: Fijación de escuadras, uniones, herrajes, montantes, sobre madera con taladro previo.
Fijación de estructuras metálicas sobre hormigón o ladrillo con taco de nylon.

- For use in any type of wood carpentry assemblies.
- Special flower type head, with TX-40 footprint.
- Once fixed, a zamak plug is inserted under pressure in the TX recess, achieving a fixing with inviolable properties.
- Applications: Fixing brackets, joints, fittings, uprights, on wood with prior drilling.
Fixing of metal structures on concrete or brick with a nylon plug.

DATOS TÉCNICOS / TECHNICAL DATA

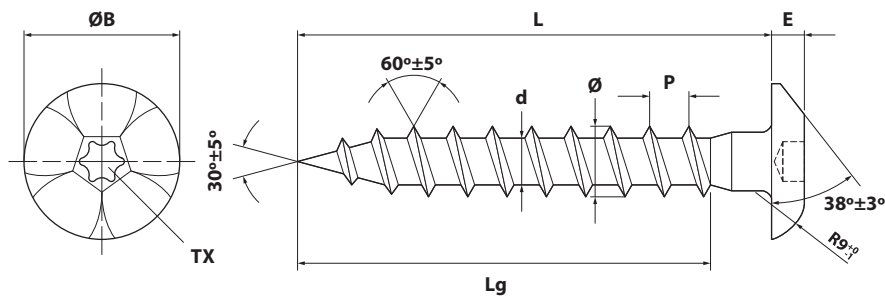


CÓDIGO Code	MEDIDA Measure ØxL m.m.	LLAVE Wrench TX	ØB m.m.	d m.m.	P m.m.	E m.m.	Lg m.m.
TITM207060	7x60	T40	16,2÷16,7	5	3,2	5	50
TITM207070	7x70	T40	16,2÷16,7	5	3,2	5	55
TITM207085	7x85	T40	16,2÷16,7	5,5	3,2	5	60
TITM207105	7x105	T40	16,2÷16,7	5,5	3,2	5	60
TITM207120	7x120	T40	16,2÷16,7	5,5	3,2	5	60
TITM207140	7x140	T40	16,2÷16,7	5,5	3,2	5	60
TITM207165	7x165	T40	16,2÷16,7	5,5	3,2	5	60

TORNILLO INVIOLABLE ROSCA MADERA TX CINCADO
ZINC PLATED MUSHROOM HEAD 6 LOBE RECESS WOOD SCREW

FICHA TÉCNICA
TECHNICAL DATA SHEET

INSTALACIÓN / INSATALLATION

MADERA / WOOD

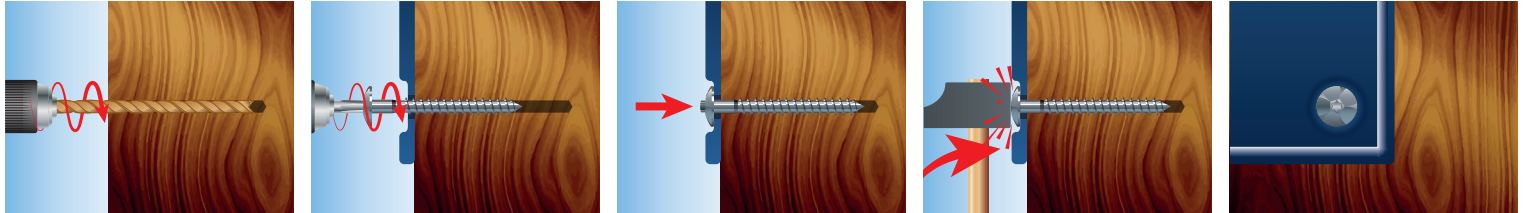

HORMIGÓN Y MAMPOSTERÍA MACIZA / CONCRETE AND SOLID MASONRY

