


**TORNILLO DIN 912 8.8 / ISO 4762 CINCADO**  
 ZINC PLATED CYLINDER HEAD SCREW WITH HEXAGONAL RECESS

**FICHA TÉCNICA**  
 TECHNICAL DATA SHEET

**Material / Material:**  
**Recubrimiento / Coating:**  
**Clase / Class:**

Acero / Steel  
 Cincado plata Cr3 5µm / Cr3 5µm Zinc plated  
 8.8

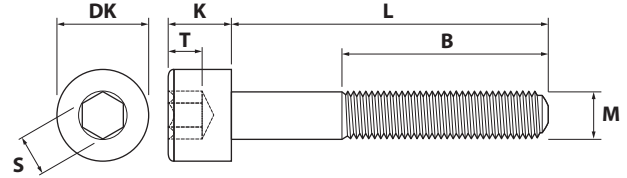

MEDIDAS DISPONIBLES / AVAILABLE MEASURES : \*  
 MEDIDAS FUERA DE GAMA / OUT OF RANGE MEASURES : -

MxL (m.m.)	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20
6	-	-	-	-	-	-	-	-	-	-	-
8	-	*	*	*	-	-	-	-	-	-	-
10	-	*	*	*	*	-	-	-	-	-	-
12	-	*	*	*	*	-	-	-	-	-	-
14	-	-	-	-	-	-	-	-	-	-	-
16	-	*	*	*	*	*	-	-	-	-	-
18	-	-	-	-	-	-	-	-	-	-	-
20	-	*	*	*	*	*	*	*	-	-	-
22	-	-	-	-	-	-	-	-	-	-	-
25	-	*	*	*	*	*	*	*	-	-	-
30	-	*	*	*	*	*	*	*	*	-	*
35	-	*	*	*	*	*	*	*	*	-	-
40	-	*	*	*	*	*	*	*	*	-	*
45	-	*	*	*	*	*	*	*	*	-	-
50	-	*	*	*	*	*	*	*	*	-	*
55	-	-	-	-	-	-	-	-	-	-	-
60	-	-	*	*	*	*	*	*	*	-	*
65	-	-	-	-	-	-	-	-	-	-	-
70	-	-	-	*	*	*	*	*	*	-	*
75	-	-	-	-	-	-	-	-	-	-	-
80	-	-	-	*	*	*	*	*	*	-	*
85	-	-	-	-	-	-	-	-	-	-	-
90	-	-	-	-	*	*	*	*	*	-	*
95	-	-	-	-	-	-	-	-	-	-	-
100	-	-	-	-	*	*	*	*	*	-	*
110	-	-	-	-	*	*	*	*	-	-	*
120	-	-	-	-	*	*	*	*	-	-	*
130	-	-	-	-	-	*	*	-	-	-	*
140	-	-	-	-	-	*	*	-	-	-	*
150	-	-	-	-	-	*	*	-	-	-	*
160	-	-	-	-	-	*	*	-	-	-	*
170	-	-	-	-	-	-	-	-	-	-	*
180	-	-	-	-	-	-	-	-	-	-	*
190	-	-	-	-	-	-	-	-	-	-	*
200	-	-	-	-	-	-	-	-	-	-	*
210	-	-	-	-	-	-	-	-	-	-	-
220	-	-	-	-	-	-	-	-	-	-	-
230	-	-	-	-	-	-	-	-	-	-	-
240	-	-	-	-	-	-	-	-	-	-	-
250	-	-	-	-	-	-	-	-	-	-	-
260	-	-	-	-	-	-	-	-	-	-	-
270	-	-	-	-	-	-	-	-	-	-	-
280	-	-	-	-	-	-	-	-	-	-	-
300	-	-	-	-	-	-	-	-	-	-	-

<b>B *</b>	18,0	20,0	22,0	24,0	28,0	32,0	36,0	40,0	44,0	48,0	52,0
<b>T min.</b>	1,3	2,0	2,5	3,0	4,0	5,0	6,0	7,0	8,0	9,0	10,0
<b>S (Allen)</b>	2,5	3	4	5	6	8	10	12	14	14	17
<b>K max.</b>	3,0	4,0	5,0	6,0	8,0	10,0	12,0	14,0	16,0	18,0	20,0
<b>DK</b>	5,5	7,0	8,5	10,0	13,0	16,0	18,0	21,0	24,0	27,0	30,0

\* Longitud constante de la rosca siempre que L sea mayor que B / Constant thread length as long as L is greater than B

Sobre la línea divisoria:  $\frac{\text{Longitud de rosca} = L}{\text{Longitud de rosca} = B}$


Above the dividing line:  $\frac{\text{Thread length} = L}{\text{Thread length} = B}$

**TORNILLO DIN 912 8.8 / ISO 4762 CINCADO**  
 ZINC PLATED CYLINDER HEAD SCREW WITH HEXAGONAL RECESS

**FICHA TÉCNICA**  
 TECHNICAL DATA SHEET

**Material / Material:**  
**Recubrimiento / Coating:**  
**Clase / Class:**

Acero / Steel  
 Cincado plata Cr3 5µm / Cr3 5µm Zinc plated  
 8.8

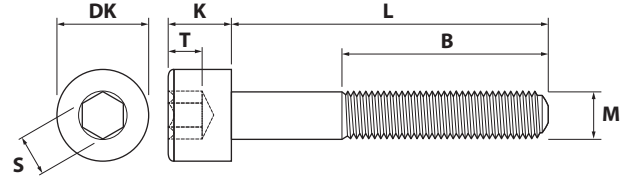

MEDIDAS DISPONIBLES / AVAILABLE MEASURES: \*  
 MEDIDAS FUERA DE GAMA / OUT OF RANGE MEASURES: -

MxL (m.m.)	M22	M24	M27	M30	M33	M36	M39	M42	M45	M48
40	-	-	-	-	-	-	-	-	-	-
45	-	-	-	-	-	-	-	-	-	-
50	-	-	-	-	-	-	-	-	-	-
55	-	-	-	-	-	-	-	-	-	-
60	-	-	-	-	-	-	-	-	-	-
65	-	-	-	-	-	-	-	-	-	-
70	-	-	-	-	-	-	-	-	-	-
75	-	-	-	-	-	-	-	-	-	-
80	-	-	-	-	-	-	-	-	-	-
85	-	-	-	-	-	-	-	-	-	-
90	-	-	-	-	-	-	-	-	-	-
95	-	-	-	-	-	-	-	-	-	-
100	-	-	-	-	-	-	-	-	-	-
110	-	-	-	-	-	-	-	-	-	-
120	-	-	-	-	-	-	-	-	-	-
130	-	-	-	-	-	-	-	-	-	-
140	-	-	-	-	-	-	-	-	-	-
150	-	-	-	-	-	-	-	-	-	-
160	-	-	-	-	-	-	-	-	-	-
170	-	-	-	-	-	-	-	-	-	-
180	-	-	-	-	-	-	-	-	-	-
190	-	-	-	-	-	-	-	-	-	-
200	-	-	-	-	-	-	-	-	-	-
210	-	-	-	-	-	-	-	-	-	-
220	-	-	-	-	-	-	-	-	-	-
230	-	-	-	-	-	-	-	-	-	-
240	-	-	-	-	-	-	-	-	-	-
250	-	-	-	-	-	-	-	-	-	-
260	-	-	-	-	-	-	-	-	-	-
270	-	-	-	-	-	-	-	-	-	-
280	-	-	-	-	-	-	-	-	-	-
300	-	-	-	-	-	-	-	-	-	-
<b>B *</b>	56,0	60,0	66,0	72,0	78,0	84,0	90,0	96,0	100,0	108,0
<b>T min.</b>	11,0	12,0	13,5	15,5	18,0	19,0	21,0	24,0	26,0	28,0
<b>S (Allen)</b>	17	19	19	22	24	27	27	32	32	36
<b>K max.</b>	22,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0
<b>DK</b>	33,0	36,0	40,0	45,0	50,0	54,0	58,0	63,0	68,0	72,0

\* Longitud constante de la rosca siempre que L sea mayor que B / Constant thread length as long as L is greater than B  
 Sobre la línea divisoria: Longitud de rosca = L / Above the dividing line: Thread length = L  
 Bajo la línea divisoria: Longitud de rosca = B / Below the dividing line: Thread length = B