

## TORNILLO AUTOPERFORANTE CABEZA EXTRAPLANA

### SELF-DRILLING SCREW WITH FLAT PAN HEAD

#### FICHA TÉCNICA

#### TECHNICAL DATA SHEET

**Material / Material:**

Acero C1022 / C1022 Steel

**Recubrimiento / Coating:**

Cincado Cr3 / Cr3 Zinc Plated

Cincado Negro / Black Zinc Plated

Lacado Blanco / White Lacquered



**FSTP**

Cincado / Zinc Plated




**FSTPN**

Cincado Negro / Black Zinc Plated



**FSTPLB**

Lacado Blanco / White Lacquered

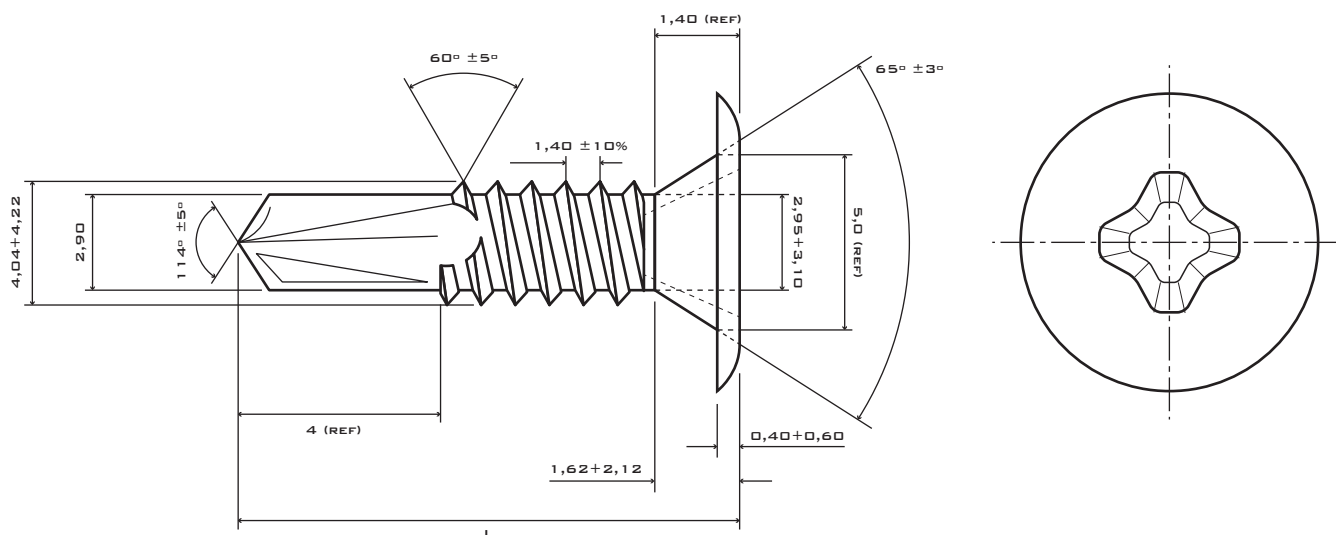

#### CARACTERÍSTICAS TÉCNICAS / TECHNICAL DATA

MEDIDA SIZE	PH	CAPACIDAD TALADRO DRILL CAPACITY	ESPESOR A FIJAR THICKNESS TO FIX	PAR MAX. APRIETE MAXIMUM TORQUE	EXTRACCIÓN PULL-OUT	VEL. TALADRO DRILL. SPEED	TIEMPO MAX. TAL. MAX DRILL. TIME
m.m.		m.m.	m.m.	Nm	Nm	rpm	rpm
4,2x14	2	2	6	4,7	6,0	2.000	2.000
4,2x23	2	2	15	4,7	6,0	2.000	2.000

**Material**

Material

**Acero especial para tratamiento térmico**

Special steel for heat treatment

**SAE J403 1022**

**Dureza Superficial**

Surface hardness

**> 500 HV**

**Dureza Núcleo**

Core hardness

**240 - 450 HV**