


## REMACHE TUBULAR FLOR ALUMINIO/ACERO ALUMINUM/STEEL PEEL DOMED HEAD BLIND RIVET

### FICHA TÉCNICA TECHNICAL DATA SHEET




<b>Cuerpo / Body</b>	Aluminio ALS154 / Aluminum ALS154
<b>Material / Material:</b>	Pulido / Polish
<b>Recubrimiento / Coating:</b>	
<b>Mandril / Mandrel</b>	Acero carbono / Carbon steel
<b>Material / Material:</b>	Cindado plata Cr3 / Zinc plated Cr3
<b>Recubrimiento / Coating:</b>	

### DATOS TÉCNICOS / TECHNICAL DATA

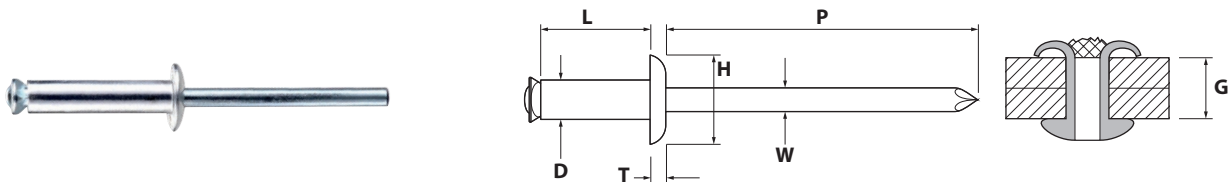

#### RESAF

Ø	D	H	T	P min.	W nom.	CIZALLA TÍPICA Typical shear Cisaillement typique	TRACCIÓN TÍPICA Typical tensile Traction typique	Ø AGUJERO Hole Ø Ø Foret m.m.
m.m.	m.m.	m.m.	m.m.	m.m.	m.m.	N min.	N min.	m.m.
<b>4,0</b>	3,85-4,15	7,0-8,0	1,5	27	2,22	1.160	1.560	4,3-4,4
<b>4,8</b>	4,65-4,95	8,5-9,5	1,6	27	2,72	1.690	2.230	5,1-5,2

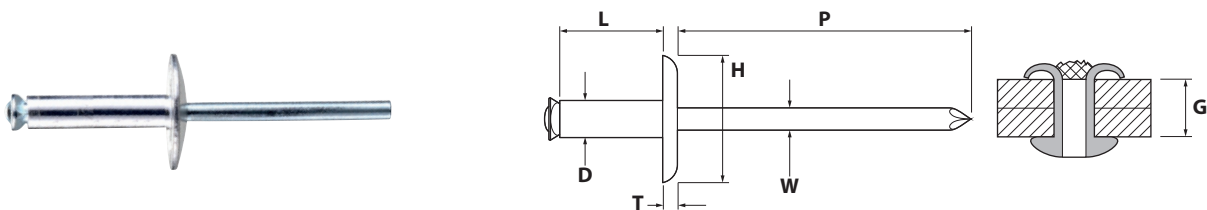

#### RFA

Ø / H	D	H	T	P min.	W nom.	CIZALLA TÍPICA Typical shear Cisaillement typique	TRACCIÓN TÍPICA Typical tensile Traction typique	Ø AGUJERO Hole Ø Ø Foret m.m.
m.m.	m.m.	m.m.	m.m.	m.m.	m.m.	N min.	N min.	m.m.
<b>4,0 / 10</b>	3,85-4,15	9,0-10,5	1,9	27	2,22	1.160	1.560	4,33-4,4
<b>4,0 / 12</b>	3,85-4,15	11,0-12,5	1,9	27	2,22	1.160	1.560	4,33-4,4
<b>4,8 / 14</b>	4,65-4,95	13,0-14,5	2,1	27	2,72	1.690	2.230	5,1-5,2
<b>4,8 / 16</b>	4,65-4,95	15,0-16,5	2,1	27	2,72	1.690	2.230	5,1-5,2

**REMACHE TUBULAR FLOR ALUMINIO/ACERO**  
**ALUMINUM/STEEL PEEL DOMED HEAD BLIND RIVET**

**FICHA TÉCNICA**  
 TECHNICAL DATA SHEET

**DATOS TÉCNICOS / TECHNICAL DATA**

**RESAF**

Ø	L	G
m.m.	-0,1/+0,5 m.m.	m.m.
<b>4,0</b>	10	2,5-5,0
	12	4,5-7,0
	14	6,5-8,0
	16	7,5-10,0
	18	9,5-12,0
	20	11,5-14,0
<b>4,8</b>	25	13,5-19,0
	10	2,0-4,0
	12	3,5-6,0
	14	5,5-8,0
	16	7,5-10,0
	18	9,5-12,0
	21	12,5-15,0
	24	14,5-18,0
	30	20,5-24,0
	40	28,5-34,0

**RFA**

Ø	L	G
m.m.	-0,1/+0,5 m.m.	m.m.
<b>4,0</b>	10	2,5-5,0
	12	4,5-7,0
	14	6,5-8,0
	16	7,5-10,0
	18	9,5-12,0
	20	11,5-14,0
<b>4,8</b>	10	2,0-4,0
	12	3,5-6,0
	14	5,5-8,0
	16	7,5-10,0
	18	9,5-12,0
	21	12,5-15,0
	24	14,5-18,0
	27	17,5-21,0
30	28,5-34,0	