



TENSOR ARO-ARO CINCADO


ZINC PLATED TURNBUCKLES WITH TWO EYES

FICHA TÉCNICA

TECHNICAL DATA SHEET

Material / Material:	Acero Fe 430 B (Cuerpo: Hierro Fundido) Steel Fe 430 B (Body: Cast Iron)
Recubrimiento / Coating:	Cincado Zinc plated
Pasivado / Passivated:	Azul Blue
Micraje / Microns:	6 μ 6 μ
Corrosión / Corrosion:	Óxido blanco - 6h C.N.S. Óxido rojo - 72h C.N.S. White oxide - 6h C.N.S. Red oxide - 72h C.N.S.

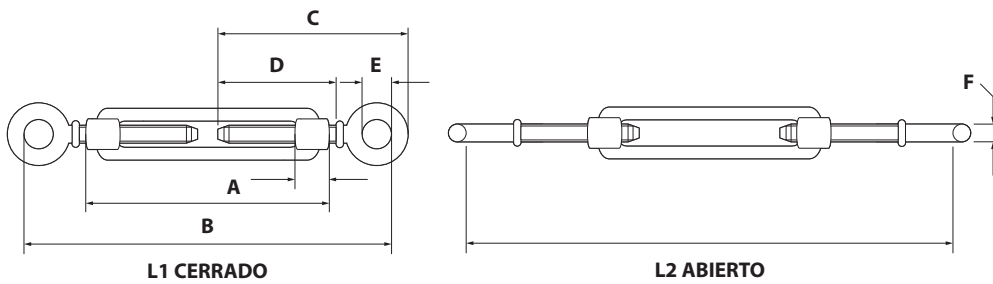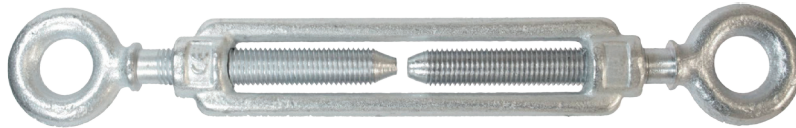

CÓDIGO Code / Code	MEDIDA Measure / Mesure M m.m.	* CMA Kg	A m.m.	B m.m.	C m.m.	D m.m.	E m.m.	F m.m.	L1 m.m.	L2 m.m.	CINCADO / ZINC PLATED	
											PESO Weight / Poids	
											Kg.	
TAAZ05	5	140	9	79	59	40	8	4	110	170	0,04	100
TAAZ06	6	225	10	88	74	50	10	4	140	208	0,06	50
TAAZ08	8	410	12	110	80	52	11	5	150	236	0,15	30
TAAZ10	10	650	15	130	97	60	14	6,5	180	280	0,21	20
TAAZ12	12	930	18	140	106	67	17	8	196	300	0,34	10
TAAZ14	14	1.330	20	170	126	83	18	8,5	233	365	0,50	40
TAAZ16	16	1.770	22,5	190	160	97	23	13	294	440	0,93	10
TAAZ20	20	2.200	30	220	190	116	25	14	352	510	1,42	10
TAAZ22	22	3.300	33	242	200	120	30	16	368	544	2,11	5
TAAZ24	24	3.920	39	255	210	125	34	17	386	563	2,76	5

CMA.: Carga máxima admisible, PA.: Par de apriete. / CMA.: Maximum allowable load. PA.: Torque / CMA.: Charge maximale admisible. PA.: Couple de serrage / CMA.: Maximal zulässige Belastung, PA.: Anzugsdrehmoment.