

TACO AUTOPERFORANTE PARA CARTÓN-YESO DE NYLON


NYLON SELF DRILLING ANCHOR FOR PLASTERBOARD

FICHA TÉCNICA


TECHNICAL DATA SHEET



Material / Material:	Nylon Nylon
---------------------------------	----------------

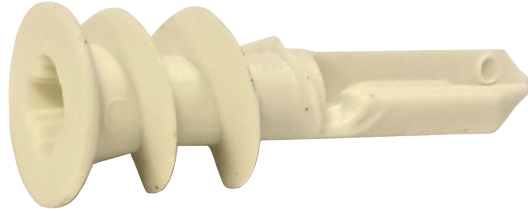

DATOS TÉCNICOS / TECHNICAL DATA

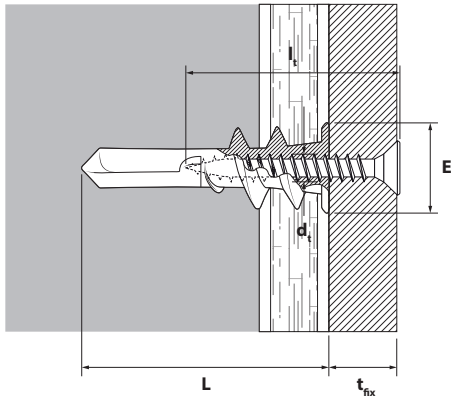


CÓDIGO Code	LARGO Length L m.m.	Ø CABEZA Head Ø E m.m.	TORNILLO Screw d _t x l _t m.m.	GROSOR PARED Wall thickness t _{fix} m.m.	* CARGA Load kg
TPN	37	14	4,5x35	5-17	8

* La carga de rotura depende de la superficie a fijar (calidad, grosor, etc.) además de la resistencia del taco. Aunque en las pruebas se superan los 25 kg es aconsejable considerar la carga de rotura en 8kg.
 The breaking load depends on the surface to be fixed (quality, thickness, etc.) in addition to the strength of the plug. Although the tests exceed 25 kg, it is advisable to consider the breaking load at 8 kg.

APLICACIONES / APPLICATIONS

El taco TPN está diseñado para la instalación de cargas medias en placas de cartón yeso de forma rápida y sin necesidad de taladro previo.
 The TPN plug is designed for the installation of medium loads in plasterboard quickly and without the need for prior drilling.

INSTALACIÓN / INSTALLATION

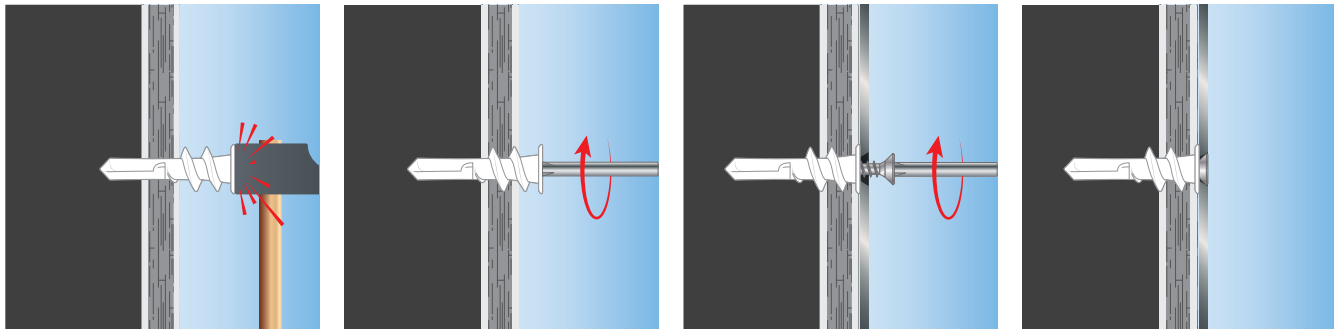

TACO AUTOPERFORANTE PARA CARTÓN-YESO DE ZAMAK
ZAMAK SELF DRILLING ANCHOR FOR PLASTERBOARD

FICHA TÉCNICA
TECHNICAL DATA SHEET




**Material /
Material:**

Zamak
Zamak



DATOS TÉCNICOS / TECHNICAL DATA

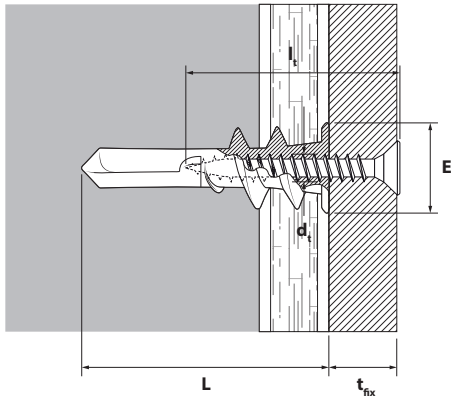

CÓDIGO Code	LARGO Length L m.m.	Ø CABEZA Head Ø E m.m.	TORNILLO Screw d ₁ x l _t m.m.	GROSOR PARED Wall thickness t _{fix} m.m.	* CARGA Load kg
TPZ	37	14	4,5x35	5-17	8

* La carga de rotura depende de la superficie a fijar (calidad, grosor, etc.) además de la resistencia del taco. Aunque en las pruebas se superan los 25 kg es aconsejable considerar la carga de rotura en 8kg.
The breaking load depends on the surface to be fixed (quality, thickness, etc.) in addition to the strength of the plug. Although the tests exceed 25 kg, it is advisable to consider the breaking load at 8 kg.

APLICACIONES / APPLICATIONS

El taco TPZ está diseñado para la instalación de cargas medias en placas de cartón yeso de forma rápida y sin necesidad de taladro previo.
The TPZ plug is designed for the installation of medium loads in plasterboard quickly and without the need for prior drilling.

INSTALACIÓN / INSTALLATION

