

TORNILLO DIN 963 / ISO 2009 CINCADO


ZINC PLATED COUTENRSUNK FLAT HEAD SCREW WITH SLOT RECESS

FICHA TÉCNICA

TECHNICAL DATA SHEET

Material / Material:
Recubrimiento / Coating:
Clase / Class:

Acero / Steel
Cincado plata Cr3 5µm / Cr3 5µm Zinc plated
4.8

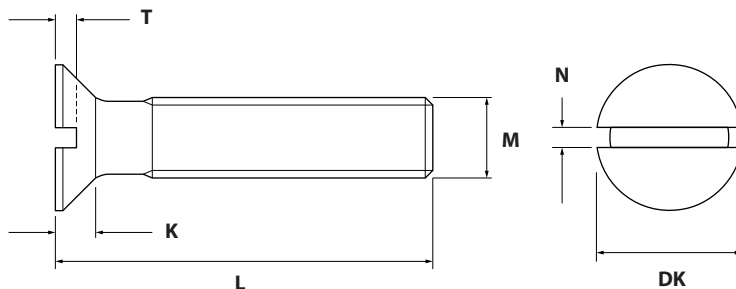

MEDIDAS DISPONIBLES / AVAILABLE MEASURES

MxL (m.m.)	M2	M2,5	M3	M3,5	M4	M5	M6	M8	M10	M12	M16
4	*	*	*								
5	*	*	*	*	*						
6	*	*	*	*	*	*					
8	*	*	*	*	*	*	*				
10	*	*	*	*	*	*	*	*			
12	*	*	*	*	*	*	*	*			
14	*	*	*	*	*	*	*	*			
16	*	*	*	*	*	*	*	*	*		
18	*	*	*	*	*	*	*	*	*		
20	*	*	*	*	*	*	*	*	*	*	
22	*	*	*	*	*	*	*	*	*	*	
25	*	*	*	*	*	*	*	*	*	*	*
30	*	*	*	*	*	*	*	*	*	*	*
35			*		*	*	*	*	*	*	*
40			*		*	*	*	*	*	*	*
45			*		*	*	*	*	*	*	*
50			*		*	*	*	*	*	*	*
55			*		*	*	*	*	*	*	*
60			*		*	*	*	*	*	*	*
65					*	*	*	*	*	*	*
70					*	*	*	*	*	*	*
75					*	*	*	*	*	*	*
80					*	*	*	*	*	*	*
					*	*	*	*	*	*	*

Paso / Pitch	0,4	0,45	0,5	0,6	0,7	0,8	1,0	1,25	1,5	1,75	2,0
T min.	0,40	0,50	0,60	0,70	0,80	1,00	1,20	1,60	2,00	2,40	3,20
N	0,50	0,60	0,80	0,80	1,00	1,20	1,60	2,00	2,50	3,00	4,00
K	1,20	1,50	1,65	1,93	2,20	2,50	3,00	4,00	5,00	6,00	8,00
DK	3,8	4,7	5,6	6,5	7,5	9,2	11,0	14,5	18,0	22,0	29,0