

TENSOR GANCHO-GANCHO CINCADO

ZINC PLATED TURNBUCKLES WITH TWO HOOKS

FICHA TÉCNICA

TECHNICAL DATA SHEET

Material / Material:

Acero Fe 430 B (Cuerpo: Hierro Fundido)
 Steel Fe 430 B (Body: Cast Iron)

Recubrimiento / Coating:

Cincado
 Zinc plated

Pasivado / Passivated:



Azul
 Blue

Micraje / Microns:

6 µ
 6 µ

Corrosión / Corrosion:

Óxido blanco - 6h C.N.S. Óxido rojo - 72h C.N.S.
 White oxide - 6h C.N.S. Red oxide - 72h C.N.S.

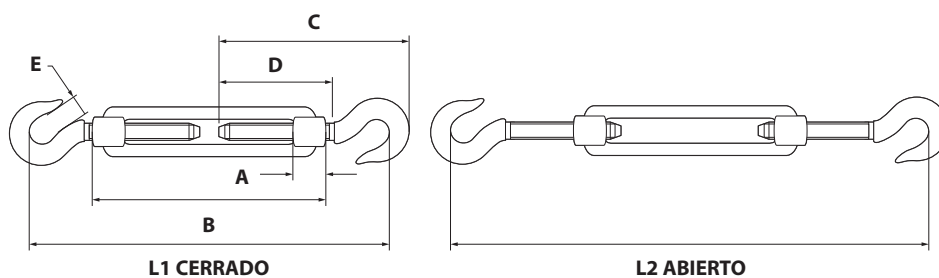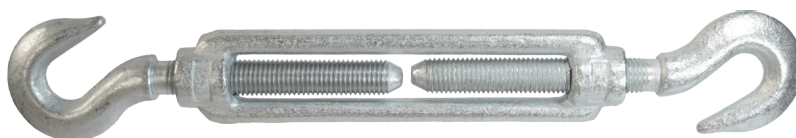

CÓDIGO Code / Code	MEDIDA Measure / Mesure M m.m.	*CMA Kg	A m.m.	B m.m.	C m.m.	D m.m.	E m.m.	L1 m.m.	L2 m.m.	PESO Weight / Poids Kg.
TGGZ05	5	50	9	79	62	40	6	112	173	0,05
TGGZ06	6	75	10	88	76	50	8,5	140	208	0,07
TGGZ08	8	165	12	110	89	52	10	246	246	0,12
TGGZ10	10	235	15	130	103	62	12	188	288	0,27
TGGZ12	12	320	18	140	121	65	16	220	324	0,42
TGGZ14	14	420	20	170	144	82	16	260	390	0,62
TGGZ16	16	530	22,5	190	172	105	16,5	312	452	0,95
TGGZ20	20	730	30	220	185	110	17,5	330	490	1,54
TGGZ22	22	1.120	33	242	216	125	23	390	566	2,25
TGGZ24	24	1.550	39	255	225	125	23	396	573	2,92

CMA.: Carga máxima admisible, PA.: Par de apriete. / CMA.: Maximum allowable load, PA.: Torque / CMA.: Charge maximale admisible, PA.: Couple de serrage / CMA.: Maximal zulässige Belastung, PA.: Anzugsdrehmoment.