


MALLA DE CONEXIÓN GRADO 80 CONNECTING LINK GRADE 80

FICHA TÉCNICA TECHNICAL DATA SHEET

Material / Material:
Recubrimiento / Coating:

Acero carbono / Carbon steel
 Lacado rojo / Red lacquered

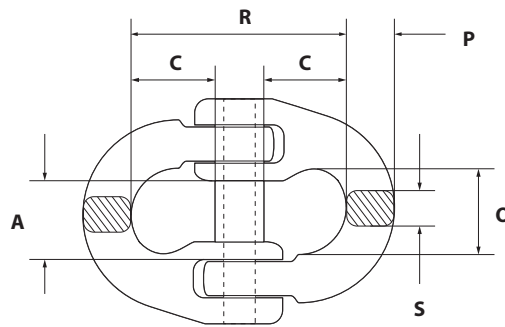

CÓDIGO <i>Code / Code</i>	Ø CADENA <i>Chain Ø / Ø Chaîne</i>	Ø CADENA <i>Chain Ø / Ø Chaîne</i>	* CMU	A	C	O	R	P	S	PESO <i>Weight / Poids</i>
	m.m.	Inch.	Tn	m.m.	m.m.	m.m.	m.m.	m.m.	m.m.	Kg.
MAC06	6	1/4	1,12	16	18	16,5	43	7,2	6,8	0,07
MAC07	7	9/32	1,50	17,8	20	20,5	50,5	10,2	9	0,10
MAC08	8	5/16	2,00	19	25,5	23,5	62	11,5	10	0,25
MAC10	10	3/8	3,15	23,8	30	27,5	72	12,6	12,6	0,35
MAC13	13	1/2	5,30	28	36	33,3	87,3	19	16,7	0,68
MAC16	16	5/8	8,00	34,3	40,5	39,5	103	20,6	20,6	1,10
MAC20	20	3/4	12,50	44	48	47	116	23	23	1,70
MAC22	22	7/8	15,00	49	51	55	133	26,5	26,5	2,20
MAC26	26	1"	21,20	60	60	66	148	31,5	31,5	4,20
MAC32	32	1"1/4	31,50	80	77	86	190	40	32	7,19

* CMU.: Carga máxima de utilización / CMU.: Working load limit