

GRILLETE RECTO DE ALTA RESISTENCIA


ALLOY STEEL DEE SHACKLES WITH SCREW PIN

FICHA TÉCNICA

TECHNICAL DATA SHEET

Material / Material:
Recubrimiento / Coating:

Acero de alta resistencia / High tensile steel
 Cincado - lacado rojo / Zinc plated - red lacquered

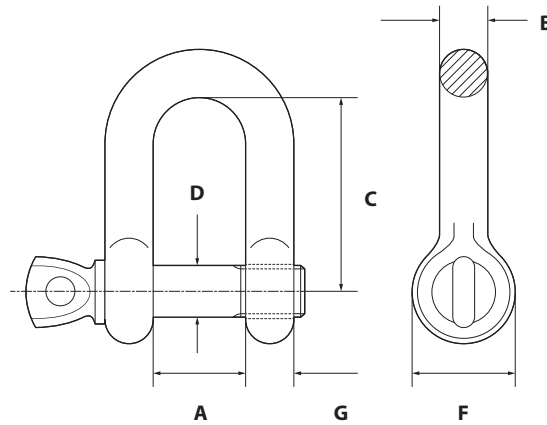

CÓDIGO Code / Code	MEDIDA Measure / Mesure	MEDIDA Measure / Mesure	* CMU	A	B	C	D	F	G	PESO Weight / Poids
	m.m.	Inch.	Tn	m.m.	m.m.	m.m.	m.m.	m.m.	m.m.	Kg.
GRAR05	5	3/16	0,33	9,5	5	19,0	6,0	15	6	0,020
GRAR06	6	1/4	0,50	11,9	6,4	22,4	7,9	16	6	0,050
GRAR08	8	5/16	0,75	13,5	7,9	26,2	9,7	19	8	0,077
GRAR10	10	3/8	1,00	16,8	9,7	31,8	11,2	23	10	0,127
GRAR12	12	1/2	2,00	20,6	12,7	41,4	16,0	30	13	0,268
GRAR16	16	5/8	3,25	26,9	16,0	50,8	19,1	39	16	0,568
GRAR20	20	3/4	4,75	31,8	19,1	60,5	22,4	47	19	1,194
GRAR22	22	7/8	6,50	36,6	25,4	71,3	25,4	54	22	1,435

CMU.: Carga máxima de utilización / CMU.: Working load limit / CMU.: Charge maximale d'utilisation / CMU.: Höchste tragfähigkeit