

ARO ANDAMIO


WELDED EYEBOLT FOR SCAFFOLDS
 PITON POUR FIXATION D'ÉCHAFAUDAGE
 GESCHWEISSTE RINGSCHRAUBE FÜR GERÜSTE



CAJA / BOX / BOÎTE

CINCADO / ZINC PLATED

CÓDIGO Code / Code	MEDIDA Measure / Mesure ØxL m.m.	Ø INT. Ø Int. / Ø Int. m.m.	CINCADO / ZINC PLATED	
AROZ12090	12x90	23	50	100
AROZ12120	12x120	23	25	100
AROZ12160	12x160	23	25	100
AROZ12190	12x190	23	25	100
AROZ12230	12x230	23	25	100
AROZ12300	12x300	23	25	100
AROZ12350	12x350	23	10	60

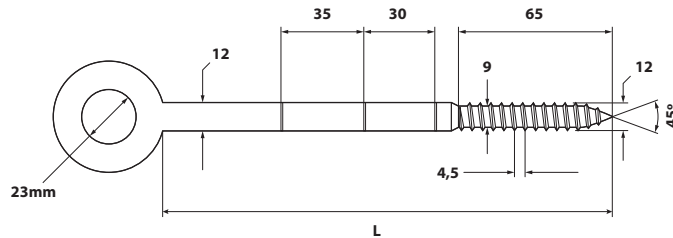

ARO ANDAMIO DIRECTO HORMIGÓN

EYEBOLT CONCRETE SCREW FOR SCAFFOLDS
 PITON À BETON POUR FIXATION D'ÉCHAFAUDAGE
 GESCHWEISSTE BETONRINGSCHRAUBE FÜR GERÜSTE




CAJA / BOX / BOÎTE

CINCADO / ZINC PLATED

CÓDIGO Code / Code	MEDIDA Measure / Mesure ØxL/Lg m.m.	Ø BROCA Drill Ø / Ø Foret D m.m.	PROF. TALADRO Hole depth / Prof. trou h1 m.m.	Øa m.m.	*CC. HORMIGÓN C20/25		CINCADO / ZINC PLATED	
					Extracción tension load / extraction kN	Cizallado shear load / cisaillement kN		
FX0114080	14x80/105	12	95	23	16,60	17,50	20	100
FX0114105	14x105/130	12	115	23	20,45	17,50	20	100

INSTALACIÓN / INSTALLATION

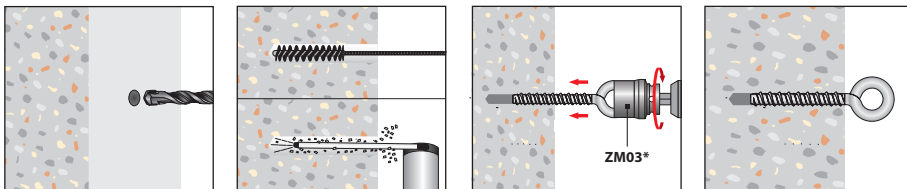

* Se recomienda una instalación con vaso de impacto especial ZM03 / An installation with the special ZM03 impact socket is recommended

